




**W. Schmid AG**

LED-Technology  
the visible difference


## Surface mounted LED indicator ABL75



ABL75, 24 VDC

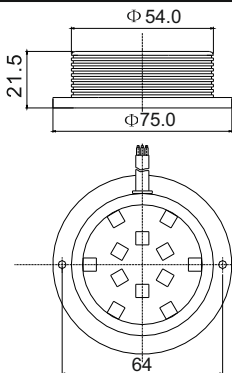

2 mounting holes  $\text{Ø}=5.0\text{mm}$ ,  
distance: 64mm

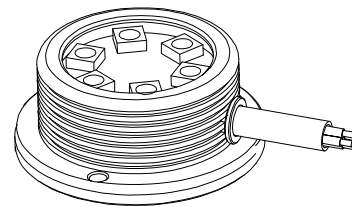

lateral cable outlet

### Specifications:

Description:	Surface mounted flat LED indicator ABL75, 75mm
Dimensions:	$\text{Ø}=75\text{mm}$ , $H=21.5\text{mm}$
Supply voltage:	24 VDC
Power consumption:	2.88W
Viewing angle:	$120^\circ$
Degree of protection:	IP 65
Class of protection:	III
Operating temperature:	-25 up to $+50^\circ\text{C}$
Material:	Colourless anodized aluminium, silicone sealing
Weight:	0.09kg
Connection:	Cable, length: 0.3-0.4m
Available ill. colours:	white, warm white, red, yellow, green, blue, orange, RGB
Applications:	Pilot light, access control, machine illumination, wall lamp, floor lamp, alarm indicator etc.