




W. Schmid AG

LED-Technology
the visible difference


Surface mounted LED light bar LL22C



LL22C, 24 VDC

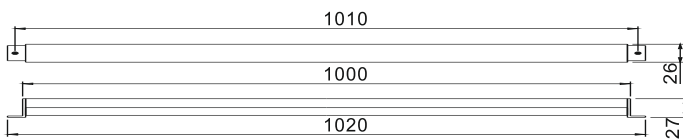

2 mounting holes $\varnothing=4.0\text{mm}$

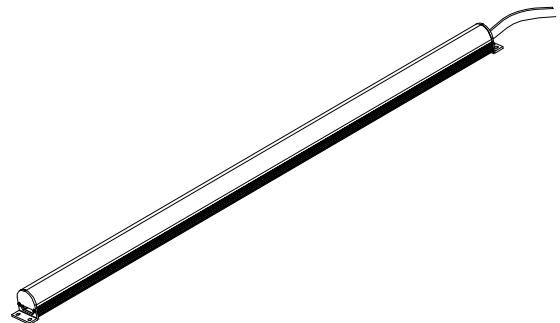

lateral cable outlet

Specifications:

Description:	Convex LED light bar LL22C, 22mm
Dimensions:	W=26mm, H=27mm, L=1000mm, other lengths upon req.
Supply voltage:	24 VDC
Power consumption:	4.8W
Radiation angle:	120°
Degree of protection:	IP 65
Class of protection:	III
Operating temperature:	-25 up to +50°C
Material:	Colourless anodized aluminium, silicone sealing cover: white PC
Weight:	0.45kg
Connection:	Cable, length: 0.3-0.4m
Available ill. colours:	white, warm white, red, yellow, green, blue, orange,
Applications:	Switching cabinet illumination, machine illumination, wall lamp, floor lamp, decorative lamp etc.