




**W. Schmid AG**

LED-Technology  
the visible difference


## LED light bar LL26C



LL26C, 24 VDC

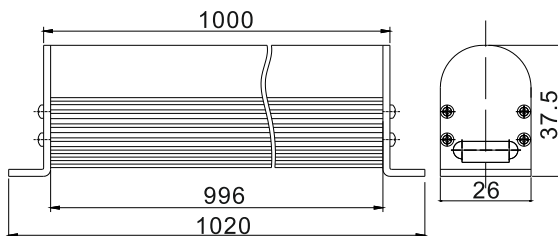

2 mounting holes  $\varnothing=4.0\text{mm}$

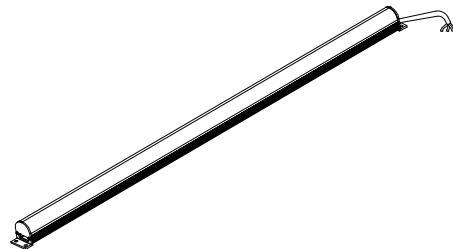

lateral cable outlet

### Specifications:

Description:	Convex LED light bar LL26C, 26mm
Dimensions:	W=26mm, H=37.5mm, L=1000mm, other lengths up. req.
Supply voltage:	24 VDC
Power consumption:	8.64W
Radiation angle:	120°
Degree of protection:	IP 65
Class of protection:	III
Operating temperature:	-25 bis +50°C
Material:	Colourless anodized aluminium, silicone sealing, cover: white PC
Weight:	0.5kg
Connection:	Cable, length: 0.3-0.4m
Available ill. colours:	white, warm white, red, yellow, green, blue, orange, RGB
Applications:	Switching cabinet illumination, machine illumination, wall lamp, floor lamp, decorative lamp, etc.